

Информация
d = Внутренний диаметр

d1 = Внешний диаметр

d2 = Диаметр головки

K = Толщина головки

L1 = Общая длина

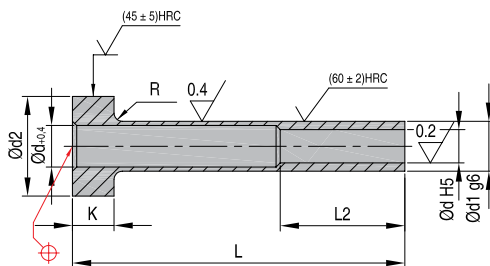
L2 = Рабочая длина

Стандарт: DIN16756/ISO8405

Материал: сталь WS

(~1.2067)

Макс. темп.: 200-250 °C

Шероховатость: Ra


| Код для заказа | Тип | d _{H5} | d1 _{g6} | d2 _{0 -0.2} | L2 | R | K _{0 -0.05} | L1 _{±0.2} | | | | | | | | | | | | | | | | | | | |
|----------------|------|-----------------|------------------|----------------------|-----|-----|----------------------|--------------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|--|--|--|--|
| | | | | | | | | 60 | 75 | 100 | 125 | 150 | 175 | 200 | 225 | 250 | 275 | 300 | 325 | 350 | | | | | | | |
| KS153 L | KS | 1,5 | 3 | 6,0 | 30 | 0,3 | 3 | | | | | | | | | | | | | | | | | | | | |
| KS163 L | | 1,6 | 3 | 6,0 | 30 | 0,3 | 3 | | | | | | | | | | | | | | | | | | | | |
| KS173 L | | 1,7 | 3 | 6,0 | 30 | 0,3 | 3 | | | | | | | | | | | | | | | | | | | | |
| KS183 L | | 1,8 | 3 | 6,0 | 30 | 0,3 | 3 | | | | | | | | | | | | | | | | | | | | |
| KS24 L | | 2,0 | 4 | 8,0 | 35 | 0,3 | 3 | | | | | | | | | | | | | | | | | | | | |
| KS224 L | | 2,2 | 4 | 8,0 | 35 | 0,3 | 3 | | | | | | | | | | | | | | | | | | | | |
| KS255 L | | 2,5 | 5 | 10,0 | 35 | 0,3 | 3 | | | | | | | | | | | | | | | | | | | | |
| KS275 L | | 2,7 | 5 | 10,0 | 45 | 0,3 | 3 | | | | | | | | | | | | | | | | | | | | |
| KS35 L | | 3,0 | 5 | 10,0 | 45 | 0,3 | 3 | | | | | | | | | | | | | | | | | | | | |
| KS325 L | | 3,2 | 5 | 10,0 | 45 | 0,3 | 3 | | | | | | | | | | | | | | | | | | | | |
| KS356 L | | 3,5 | 6 | 12,0 | 45 | 0,5 | 5 | | | | | | | | | | | | | | | | | | | | |
| KS376 L | | 3,7 | 6 | 12,0 | 45 | 0,5 | 5 | | | | | | | | | | | | | | | | | | | | |
| KS46 L | | 4,0 | 6 | 12,0 | 45 | 0,5 | 5 | | | | | | | | | | | | | | | | | | | | |
| KS428 L | | 4,2 | 8 | 14,0 | 45 | 0,5 | 5 | | | | | | | | | | | | | | | | | | | | |
| KS458 L | | 4,5 | 8 | 14,0 | 45 | 0,5 | 5 | | | | | | | | | | | | | | | | | | | | |
| KS58 L | | 5,0 | 8 | 14,0 | 45 | 0,5 | 5 | | | | | | | | | | | | | | | | | | | | |
| KS528 L | | 5,2 | 8 | 14,0 | 45 | 0,5 | 5 | | | | | | | | | | | | | | | | | | | | |
| KS558 L | | 5,5 | 8 | 14,0 | 45 | 0,5 | 5 | | | | | | | | | | | | | | | | | | | | |
| KS610 L | | 6,0 | 10 | 16,0 | 45 | 0,5 | 5 | | | | | | | | | | | | | | | | | | | | |
| KS6210 L | | 6,2 | 10 | 16,0 | 45 | 0,5 | 5 | | | | | | | | | | | | | | | | | | | | |
| KS6510 L | | 6,5 | 10 | 16,0 | 45 | 0,8 | 5 | | | | | | | | | | | | | | | | | | | | |
| KS812 L | | 8,0 | 12 | 20,0 | 45 | 0,8 | 7 | | | | | | | | | | | | | | | | | | | | |
| KS8212 L | | 8,2 | 12 | 20,0 | 45 | 0,8 | 7 | | | | | | | | | | | | | | | | | | | | |
| KS8512 L | | 8,5 | 12 | 20,0 | 45 | 0,8 | 7 | | | | | | | | | | | | | | | | | | | | |
| KS1014 L | | 10,0 | 14 | 22,0 | 45 | 0,8 | 7 | | | | | | | | | | | | | | | | | | | | |
| KS10514 L | 10,5 | 14 | 22,0 | 45 | 0,8 | 7 | | | | | | | | | | | | | | | | | | | | | |
| KS1114 L | 11,0 | 14 | 22,0 | 45 | 0,8 | 7 | | | | | | | | | | | | | | | | | | | | | |
| KS1216 L | 12,0 | 16 | 22,0 | 45 | 0,8 | 7 | | | | | | | | | | | | | | | | | | | | | |
| KS12516 L | 12,5 | 16 | 22,0 | 45 | 0,8 | 7 | | | | | | | | | | | | | | | | | | | | | |
| KS1418 L | 14,0 | 18 | 24,0 | 45 | 0,8 | 9 | | | | | | | | | | | | | | | | | | | | | |
| KS1620 L | 16,0 | 20 | 26,0 | 50 | 0,8 | 9 | | | | | | | | | | | | | | | | | | | | | |
| KS1822 L | 18,0 | 22 | 28,0 | 50 | 0,8 | 9 | | | | | | | | | | | | | | | | | | | | | |