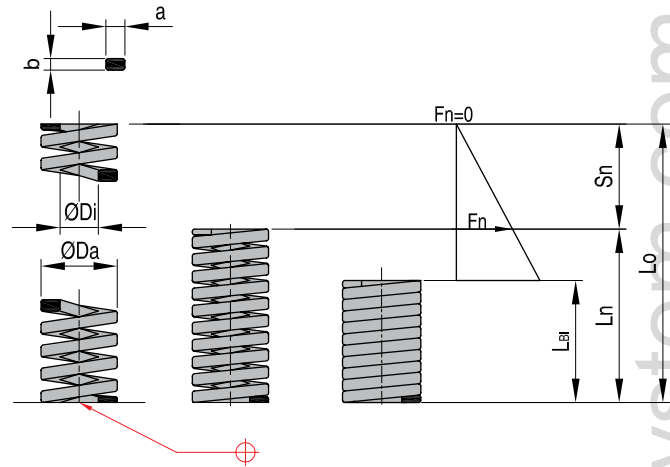


**WZ8065**

 Витые пружины, проволока прямоугольного сечения с закругленными краями Материал: пружинная сталь по DIN 17223/1 – допуск по DIN 2095(2)


| Номер $Da \times L_o$ | $Da$ | $L_o$ | $Di$ | $a \times b$ | $L_n$ | $L_{BI}$ | $S_n$ | $F_n$ (H) |
|-----------------------|------|-------|------|--------------|-------|----------|-------|-----------|
| WZ8065x11x20          | 11,0 | 20    | 7,0  | 2 x 1,25     | 10    | 9,5      | 10    | 196       |
| WZ8065x12,5x20        | 12,5 | 20    | 7,5  | 2,5 x 1,5    | 13    | 12,0     | 7     | 265       |
| WZ8065x13x50          | 13,0 | 50    | 9,0  | 2 x 1,25     | 20    | 18,0     | 30    | 147       |
| WZ8065x14x25          | 14,0 | 25    | 8,0  | 3 x 1,6      | 15    | 13,5     | 10    | 392       |
| WZ8065x15,5x25        | 15,5 | 25    | 8,5  | 3,5 x 2,2    | 17    | 15,5     | 8     | 736       |
| WZ8065x17x50          | 17,0 | 50    | 9,0  | 4 x 2        | 32    | 30,0     | 18    | 687       |
| WZ8065x17,6x30        | 17,6 | 30    | 9,6  | 4 x 2        | 18    | 17,0     | 12    | 687       |
| WZ8065x25x54          | 25,0 | 54    | 13,0 | 6 x 3        | 35    | 32,0     | 19    | 1177      |
| WZ8065x25x77          | 25,0 | 77    | 13,0 | 6 x 3        | 50    | 44,0     | 27    | 1177      |
| WZ8065x25x123         | 25,0 | 123   | 13,0 | 6 x 3        | 79    | 72,0     | 44    | 1177      |
| WZ8065x32x69          | 32,0 | 69    | 17,0 | 7,5 x 4      | 45    | 43,0     | 24    | 2453      |
| WZ8065x32x98          | 32,0 | 98    | 17,0 | 7,5 x 4      | 64    | 61,0     | 34    | 2453      |
| WZ8065x38x67          | 38,0 | 67    | 21,0 | 8,5 x 5      | 45    | 44,0     | 22    | 2943      |
| WZ8065x38x102         | 38,0 | 102   | 21,0 | 8,5 x 5      | 68    | 64,0     | 34    | 2943      |
| WZ8065x38x147         | 38,0 | 147   | 21,0 | 8,5 x 5      | 97    | 90,0     | 50    | 2943      |

1 H = 0,102 кг(с)

www.system.com.ru